


**TOSHIBA**  
Home Cinema Projectors

**mt200**

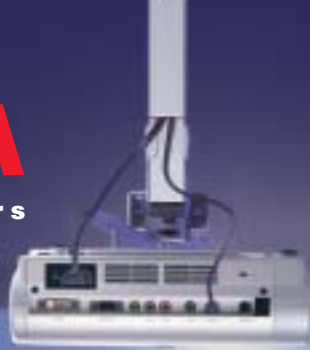

DLP™ Technology

2500:1 Contrast Ratio

True 16:9 Aspect Ratio

TrueVision™ Video Processing



The days of high-quality DLP™ Home Cinema projectors being unaffordable are over thanks to Toshiba's all new MT200.

Whether it's an all-action blockbuster movie, big match or latest gaming challenge, nothing beats the sheer thrill of a massive image, bursting with vibrant colour, in the comfort of your own living room.

Having a true 16:9 display format and excellent connectivity including Component Video and DVI inputs (HDMI compatible), the MT200 is the perfect choice.

Featuring an impressive 2500:1 contrast ratio and 6 segment colour wheel, the MT200 produces exceptional picture quality and brilliant lifelike colours, while the TrueVision™ De-Interlacer and video scalar ensure a smooth, enhanced visual performance.


Couple all this with the stylish ivory and silver finish, low operating noise and back lit remote control and the MT200 will compliment any home environment.

Now is the time to experience true digital Home Cinema.

### Projection Distance

SCREEN SIZE	Diagonal (inches)	40"	60"	80"	100"	150"	200"	250"	300"
	Horizontal (m)	0.81	1.22	1.63	2.03	3.05	4.06	5.08	6.10
Vertical (m)	0.61	0.91	1.22	1.52	2.29	3.05	3.81	4.57	
DISTANCE	Minimum (metres)	1.66	2.48	3.31	4.14	6.21	8.28	10.35	12.42
	Maximum (metres)	1.99	2.90	3.98	4.98	7.47	9.96	12.45	14.94

### Connections

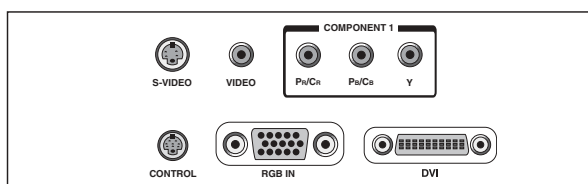

**16:9**

### Technical Specifications

Model		MT200	
Display	Display Type	DLP™	
	Shape	Aspect Ratio	16:9
		Size	0.55" WVGA panel x 1
	Number Of Pixels	409,920 pixels (854x480)	
	Drive Method	DDR 12 degree (DDP2000)	
	Contrast Ratio	2500:1	
	Resolution	Real WVGA	
Upgraded Video Processing	TrueVision De-Interlacing™		
Image	Brightness (ANSI)	750 lm	
	Lamp	200W - TLPLMT20	
	Service Life of Lamp **	3000h (Eco Mode)	
	Colour Reproduction	16.7 Million Colours	
	Colour Wheel (DLP)	Segments (Qty)	RGB 6 Segment
		Speed	4X
	Projection distance (m)	1.2 - 12.0m (3.9 - 39.3ft)	
	Picture Size (Diagonal)	0.6 - 7.36m (24 - 290")	
	Projection Method	Front, Rear, or Ceiling	
	Keystone Correction	Vertical	Digital +/-15 degrees
Horizontal		None	
Lens	Optical zoom and Focus Methods	Manual Zoom & Focus	
	"F" Value Aperture	F = 2.75 - 3.03	
	"f" Value Focal length (mm)	f = 22.3 - 26.76mm	
	Zoom Ratio	1.2 x	
	Throw Ratio	1.87 - 2.25:1	
Signal	Compatible Frequency	Horizontal (KHz)	15 - 93KHz
		Vertical (Hz)	50 - 85Hz
	Input Signals	Video Signal	NTSC / PAL / SECAM
		Colour Difference	480i/480p/576i/576p/1080i/720p
		RGB Real Display	VGA
RGB Compressed	SVGA / XGA / SXGA		
Terminals	Input	Video Signal	1x RCA Composite, 1x S-Video, 1x RCA Component, 1x DVI (HDCP)
		Computer Signal	1x DVI, 1x RGB
		Audio Signal	None
		Control and Other	RS232C (mini DIN8 pin)
	Output	None	
General	Operating Noise	32dB (Eco)	
	Embedded Speaker	None	
	Weight (kg)	2.88kg	
	Dimensions	W x D x H (mm)	298 x 101 x 275
	Power source	AC100-240V, 50 / 60Hz	
	Power Consumption (W)	263W	
	Security	Kensington Slot	
	Warranty	Projector	2 Year RTB
Lamp		90 Days	

\*\* Actual lamp life may vary based on ambient environment

### Box Contents

Operating manual, RCA, S-Video and Power cables, Remote control, Batteries

### Key Features

TrueVision De-Interlacing™  
Toshiba 10bit video Decoder  
Very high Contrast Ratio  
True 16:9 Wide Screen  
Dynamic, Standard, Cinema modes  
RGB Component input  
All Digital projector solution

# TOSHIBA

TOSHIBA INFORMATION SYSTEMS (U.K.) LTD.  
Projection and Display Technology  
Toshiba Court, Weybridge Business Park,  
Addlestone Road, Weybridge, Surrey KT15 2UL

[www.toshiba.co.uk/projectors](http://www.toshiba.co.uk/projectors)