

TOSHIBA

P75

Making light work on the road



P75



The P75 delivers a portable solution with excellent value for money.

Featuring an XGA resolution at an impressive 2300 ANSI Lumens the P75 will transform your presentations irrespective of the lighting conditions.

Weighing in at a mere 1.9kg the P75 is the perfect travel companion, and thanks to the all digital DLP™ technology it boasts a 2000:1 contrast ratio.


The P75's sleek aluminium design and slim lines also feature TrueVision™, an integrated video scalar / de-Interlacer, ensuring an image that really delivers on both data and moving images.

Check into business class with the new P75 projector from Toshiba.

Projection Distance

DISTANCE SCREEN SIZE	Diagonal (inches)	40"	60"	80"	100"	150"	200"	250"	300"
	Horizontal (m)	0.81	1.22	1.63	2.03	3.05	4.06	5.08	6.10
Vertical (m)	0.61	0.91	1.22	1.52	2.29	3.05	3.81	4.57	
Minimum (metres)	1.33	2.00	2.66	5.00	5.00	6.66	8.33	9.99	
Maximum (metres)	1.63	2.44	3.36	6.11	6.11	8.14	10.18		

Connections

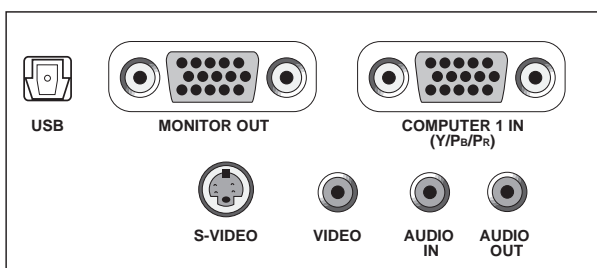

Box Contents

Operating manual & CD-ROM,
RGB and Power cables,
Mouse remote control, IR
receiver for mouse remote,
Batteries, Softcase

Key Features

Ultra Portable
Auto-Image set-up
Mouse Remote with Laser
High Contrast Ratio
Freeze Function
Eco Mode

Model		P75	
Display	Part Number	TDP-P75	
	Display Type	DLP™	
	Shape	Aspect Ratio	4:3 (16:9 Switchable)
		Size	0.7" XGA panel x 1
	Number Of Pixels	786,432 pixels (1,024x768)	
	Drive Method	DDR 12 degree (DDP2000)	
	Contrast Ratio	2000:1	
	Resolution	Real XGA	
Upgraded Video Processing	TrueVision De-Interlacing™		
Image	Brightness (ANSI)	2300 lm	
	Lamp	200W - TLPLW7	
	Service Life of Lamp **	2000h / 3000h (Eco mode)	
	Colour Reproduction	16.7 Million Colours	
	Colour Wheel (DLP)	Segments (Qty)	RGBW 4 Segment
		Speed	2X
	Projection distance (m)	1.0 - 10.0m (3.2 - 32.81ft)	
	Picture Size (Diagonal)	0.76 - 7.62m (30.0 - 300")	
	Projection Method	Front, Rear, or Ceiling	
	Keystone Correction	Vertical	Digital +/-15 degrees
		Horizontal	None
	Lens	Optical zoom and Focus Methods	Manual Zoom & Focus
"F" Value Aperture		F = 2.4 - 2.6	
"f" Value Focal length (mm)		f = 24.0 - 29.1mm	
Zoom Ratio		1.2 x	
Throw Ratio		1.63 - 2.05:1	
Signal	Compatible Frequency	Horizontal (KHz)	15.6 - 68.7kHz
		Vertical (Hz)	48 - 85Hz
	Input Signals	Video Signal	NTSC / PAL / SECAM
		Colour Difference	480i/480p/525i/525p/1080i/720p
		RGB Real Display	VGA / SVGA / XGA
		RGB Compressed	SXGA
Terminals	Input	Video Signal	1x S-Video, 1 x RCA
		Computer Signal	1 x RGB
		Audio Signal	1 x Stereo Mini Jack
		Control and Other	USB
	Output	1 x RGB, 1x Stereo Mini Jack	
General	Operating Noise	35dB (Eco)	
	Embedded Speaker	1W Mono	
	Weight (kg)	1.9kg	
	Dimensions W x D x H	245 x 183 x 86	
	Power source	AC100-240V, 50 / 60Hz	
	Power Consumption (W)	265W	
	Security	Kensington Slot	
Warranty	Projector	3 Year RTB	
	Lamp	90 Days	

** Actual lamp life may vary based on ambient environment

TOSHIBA

TOSHIBA INFORMATION SYSTEMS (U.K.) LTD.

Projection and Display Technology
Toshiba Court, Weybridge Business Park,
Addlestone Road, Weybridge, Surrey KT15 2UL

www.toshiba.co.uk/projectors