

TOSHIBA

performance **t250**



t h e r i g h t i m p r e s s i o n

DLP™ Technology

3000 Ansi Lumens

2000:1 Contrast Ratio

National Colour Enhancer

performance

t250



The T250's state-of-the-art DLP™ projection technology, with its 3000 ANSI lumens high brightness and XGA resolution specifications, ensure stunning image quality in any environment no matter what the lighting conditions.

Completely versatile the T250 is also ceiling mountable and rear projection compatible making this the right solution for all your conferencing requirements. Ease of use is the name of the game, and thanks to the T250's One Button Auto Set-up you can rest assured of the best possible image quality.


A host of features are included as standard on the T250, these include:

- Quick Start
- Auto Setup
- Auto Vertical Keystone
- Horizontal Keystone
- Auto Input search
- User Logo capture
- Password Protection
- Panel Lock
- Black Board Function
- Picture in Picture
- Network Management
- 10/100 Ethernet RJ45
- Monitor Re-Drive
- Audio In and Out
- Eco Mode
- Top lamp access
- Instant Shut down

Projection Distance

DISTANCE / SCREEN SIZE	Diagonal (inches)	40"	60"	80"	100"	150"	200"	250"	300"
	Horizontal (m)	0.81	1.22	1.63	2.03	3.05	4.06	5.08	6.10
Vertical (m)	0.61	0.91	1.22	1.52	2.29	3.05	3.81	4.57	
Minimum (metres)	1.29	1.96	2.63	3.30	4.97	6.64	8.32	9.99	
Maximum (metres)	1.56	2.37	3.18	3.99	6.01	8.03	10.1	12.1	

Connections

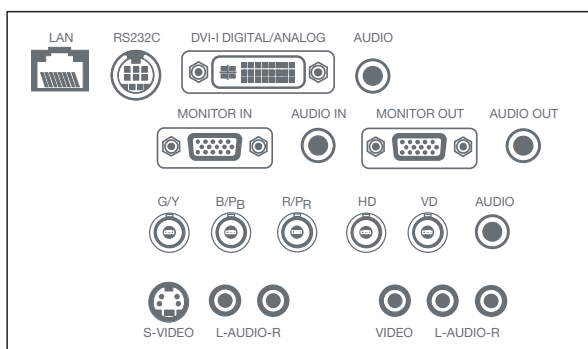

Model		T250		
Display	Display Type	DLP™		
	Shape	Aspect Ratio	4:3 (16:9 Switchable)	
		Size	0.7" XGA panel x 1	
	Number Of Pixels	786,432 pixels (1,024x768)		
	Drive Method	DDR 12 degree (DDP2000)		
	Contrast Ratio	2000:1		
Resolution	Real XGA			
Upgraded Video Processing		Pixelworks PW288		
Image	Brightness (ANSI)	3000 lm		
	Lamp	300W - TLPLW6		
	Service Life of Lamp **	2000h / 3000h (Eco mode)		
	Colour Reproduction	16.7 Million Colours		
	Colour Wheel (DLP)	Segments (Qty)	RGBW 4 Segment	
		Speed	2X	
	Projection distance (m)	1.3 - 12.1m (4.2ft - 39.70ft)		
	Picture Size (Diagonal)	0.84 - 7.62m (33.1 - 300")		
	Projection Method		Front, Rear, or Ceiling	
	Keystone Correction	Vertical	Digital +/-45 degrees	
Horizontal		Digital +/-45 degrees		
Lens	Optical zoom and Focus Methods		Manual Zoom & Focus	
	"F" Value Aperture		F = 2.4 - 2.6	
	"f" Value Focal length (mm)		f = 23 - 27.6mm	
	Zoom Ratio		1.2 x	
	Throw Ratio		1.62 - 1.96:1	
Signal	Compatible Frequency	Horizontal (KHz)	15 - 120kHz	
		Vertical (Hz)	30 - 150Hz	
	Input Signals	Video Signal	NTSC / PAL / SECAM	
		Colour Difference	480i/480p/576i/576p/1080i/720p	
		RGB Real Display	VGA / SVGA / XGA	
RGB Compressed		SXGA / UXGA		
Terminals	Input	Video Signal	1x RCA, 1x DVI, 5x BNC, 1x S-Video	
		Computer Signal	1x DVI, 1x RGB	
		Audio Signal	3 x Stereo Mini Jack, 2 x RCA	
		Control and Other	RS232C, RJ45	
	Output	1 x RGB, 1 x Stereo Mini Jack		
General	Operating Noise		32dB (28dB Eco)	
	Embedded Speaker		2 x 4W Stereo	
	Weight (kg)		4.9kg	
	Dimensions	W x D x H	340 x 314 x 115	
	Power source		AC100-240V, 50 / 60Hz	
	Power Consumption (W)		390W	
	Security			Kensington Slot, Panel Lock, Password Protection
	Warranty	Projector	3 Year RTB	
Lamp		90 Days		

** Actual lamp life may vary based on ambient environment
E&OE, subject to change without notice

Box Contents

Operating manual & CD-ROM,
3m RGB lead, Power cable,
Remote control with Wireless
mouse and laser pointer,
Batteries, Carry case,



TOSHIBA

TOSHIBA INFORMATION SYSTEMS (U.K.) LTD.
Projection and Display Technology
Toshiba Court, Weybridge Business Park,
Addlestone Road, Weybridge, Surrey KT15 2UL

www.toshiba.co.uk/projectors